




### Battery Installation

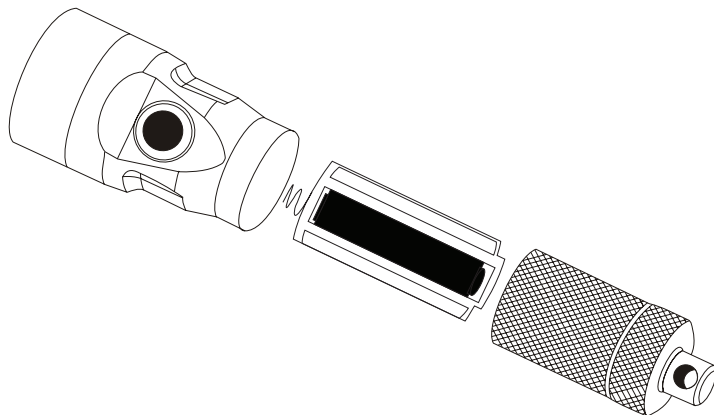

### Battery Polarity

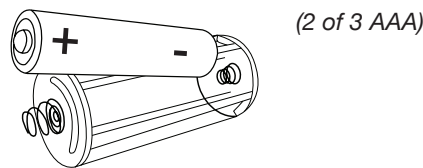

(2 of 3 AAA)

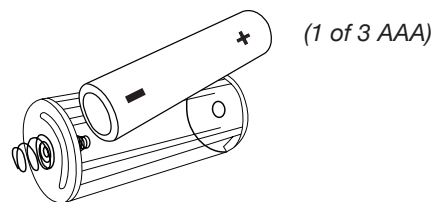

(1 of 3 AAA)

### Instructions for Use

- Unscrew the two body sections and remove the battery cartridge.
- Insert 3 AAA alkaline batteries following the polarity on the diagram above. The flat (minus) end on each battery goes against the small spring.
- Inspect the o-rings to make sure that they are clean and free of any lint, hair or debris. Place a light film of silicone grease on the o-rings. This will make assembly / disassembly much easier.
- Insert battery cartridge with center spring facing the head of the light.
- Carefully thread body sections back together being careful not to pinch or unseat o-rings.

### Battery Precautions:

- Use only AAA alkaline batteries
- Respect the correct polarity when installing the batteries. Reversed batteries may cause permanent damage to the light.
- Do not mix different types or different brands of batteries
- Do not mix old and new batteries. Always replace them as a set of 3.
- Do not dispose of batteries in fire.
- Remove batteries if light is to be left unused for an extended period of time.

### Care and Maintenance

- After each dive, rinse your light thoroughly with clean, fresh water
- If you are going to open the light, dry with towel first.
- Keep all o-rings cleaned and lubricated with a light coating of silicone grease.
- Store light in a cool place, out of direct sunlight and away from heat sources.

### Features

Power Source	CREE XPG2-S3 3W
Output	High 300 lm, Mid 150 lm
Burn Time	High - 1hr. Mid - 2hr
Battery	3x AAA alkaline
Switch	3-position (High-Mid-Off) button switch
Beam Distance	788 ft. (240 m)
Beam Angle	5 degrees
Material	T6061-T6 Anodized Aluminum
Bulb Life	50,000 hour life
Impact Resistant	1 m
Depth Tested	328 ft. (100 m)
Length	5.2 in. (131 mm)
Head Diameter	1.6 in. (39.5 mm)
Body Diameter	1 in. (26.5 mm)
Weight (including battery)	6 oz. (170g)

### Notice:

*The stated data has been measured according to the international flashlight testing standards in the laboratory. The data may vary with environmental conditions.*

### Warranty:

- Your XS Scuba light is covered by a full 12 month warranty.
- Within 14 days of purchase, if a fault occurs due to defect, the light will be replaced (proof of purchase required).
- After 14 days and within 12 months of purchase, your light will be repaired or replaced at the discretion of XS Scuba.
- Excluded is damage caused by incorrect battery insertion (reversed polarity), battery leakage, disassembly, modification or abuse.